

Datasheet: EN CuFe2P / CW107C Low alloyed Copper Tubes Alumeco ApS 21-03-2025				Internal alloy name: CW107C Metal: Copper Chemical Symbol: CuFe2P EN: EN CuFe2P UNS: C19400 SS: - GB: TFe2.5 JIS: - Also known as: - Alloy type: Electrical conducting			
Main usage: - Automotive - Cables and wires - Clamps, connectors and fasteners - Electrical installations - Electronic products - Lightning rods and grounding				Important norms and literature: General Standards EN 12449:2023: Copper and copper alloys – Seamless, round tubes for general purposes Geometric Tolerance: EN 12449:2023: Copper and copper alloys – Seamless, round tubes for general purposes			
Main properties: - High thermal and electrical conductivity - Excellent forming properties							
Chemical composition in %: EN 12449:2023							
Cu	Fe	Pb	Zn	P	Other elements		
					Each	Together	
Rest	2,1 – 2,6	Max. 0,03	0,05 – 0,2	0,015 – 0,15	-	Max. 0,2	
Mechanical properties: EN 12449:2023							
Material Condition	Wall Thickness <i>t</i>	Tensile Strength <i>R_m</i>	0,2% proof strength <i>R_{p0,2}</i>	Elongation <i>A</i>	Hardness		
	Max. mm	Min. MPA	MPa	Min. %	HV	HBW	
M	20	-	-	-	165 – 215	160 – 210	
R300	10	300	Max. 250	25	-	-	
H085	10	-	-	-	85 – 115	80 – 110	
R370	5	370	Min. 250	15	-	-	
H110	5	-	-	-	110 – 140	105 – 135	
R420	5	420	Min. 320	5	-	-	
H135	5	-	-	-	Min. 135	Min. 130	
* Information values only;							
Physical properties:							
Density	Solidification range	Electrical conductivity	Thermal conductivity (20 °C)	Thermal expansion (20 - 300 °C)	Annealing temperature	E – modulus (20 °C)	
g/cm³	°C	%IACS	W/m K	µm m ⁻¹ K ⁻¹	°C	N / mm²	
8,78	1084	64,7	262	17	-	123.000	
Properties and information's (3 Excellent; 2 Good; 1 Poor/not recommendable)¹							
Machinability (Zerspanbarkeitsindex): 20* *(CuZn39Pb3 = 100)		Joining Methods: Soldering: 3 Brazing: 2 Oxy-acetylene welding: 1 Gas-shielded arc welding: 1 TIG welding: 1 MIG welding: 1 Spot/seam welding: 1 Butt welding: 2 Gluing/adhesion: 2			Surface Treatment: Polishing: Mechanical: 2 Electrolytic/chemical: 3 Galvanizing: 3 Hot Dipping: 3		
Forming Methods: Hot Formability: 2 Cold Formability: 3							
Corrosion resistance: Atmosphere: 2 Waters and alkaline: 2 Acids, Ammonia, Seawater: 1							
¹Information extracted from Kunftanverband:							

¹Information extracted from Kupferverband;

Tolerances for Tubes of CW107C

Dimensions: EN 12449:1999*

Tolerances on diameter

Nominal diameter d (mm)	Tolerances on nominal diameter (mm)	
	Applicable to mean diameter	Applicable to any diameter including deviation from circular form for straight lengths
$3 \leq d \leq 10$	$\pm 0,06$	$\pm 0,12$
$10 < d \leq 20$	$\pm 0,08$	$\pm 0,16$
$20 \leq d \leq 30$	$\pm 0,12$	$\pm 0,24$
$30 \leq d \leq 50$	$\pm 0,15$	$\pm 0,30$
$50 \leq d \leq 100$	$\pm 0,20$	$\pm 0,50$
$100 \leq d \leq 200$	$\pm 0,50$	$\pm 1,00$
$200 \leq d \leq 300$	$\pm 0,75$	$\pm 1,50$
$300 \leq d \leq 450$	$\pm 1,00$	$\pm 2,00$

* Values are referred from Table 16 of EN 12449:1999

Dimensions: EN 12449:1999*

Tolerances on wall thickness

Nominal outside diameter D (mm)	Tolerances on nominal wall thickness t (mm)				
	%				
	$0,3 \leq t \leq 1$	$1 < t \leq 3$	$3 < t \leq 6$	$6 < t \leq 10$	$10 < t$
$3 \leq D \leq 40$	± 15	± 13	± 11	± 10	-
$40 < D \leq 120$	± 15	± 13	± 12	± 11	± 10
$120 \leq D \leq 250$	-	± 13	± 13	± 12	± 11
$250 \leq D \leq 450$	-	-	± 15	± 15	± 15

* Values are referred from Table 17 of EN 12449:1999

Dimensions: EN 12449:1999*

Tolerances on fixed lengths, tubes in straight lengths

Nominal outside diameter D (mm)	Tolerance on fixed length l (mm)			
	$l \leq 250$	$250 < l \leq 1000$	$1000 < l \leq 4000$	$4000 < l$
$3 \leq D \leq 25$	+1 0	+3 0	+5 0	By agreement
$25 < D \leq 100$	+2 0	+5 0	+7 0	
$100 < D \leq 450$	+3 0	+5 0	+10 0	

* Values are referred from Table 18 of EN 12449:1999

Dimensions: EN 12449:1999*

Tolerances on fixed lengths, tube in coils (not level wound)

Specified length L (m)	Tolerance %
$L \leq 50$	+2 0
$50 < L \leq 100$	+3 0
$100 < L$	+5 0

* Values are referred from Table 19 of EN 12449:1999

Dimensions: EN 12449:1999*

Tolerances on diameter including deviation from circular form, tube in coils

Nominal outside diameter D (mm)	Tolerances on nominal diameter including deviation from circular form	Applicable for coil inside diameter min.
$3 \leq D \leq 6$	$\pm 0,30$	400
$6 < D \leq 10$	$\pm 0,50$	600
$10 \leq D \leq 20$	$\pm 0,70$	800
$20 \leq D \leq 30$	$\pm 0,90$	1000

* Values are referred from Table 20 of EN 12449:1999

Dimensions: EN 12449:1999*
Tolerances on straightness

Ratio of	Depth of arc (see Figure 1)	
	h_1 in any length l_1 of 1000 mm max.	h_2 in any length l_2 of 400 mm max.
$r \leq 5$	2	0,8
$5 < r \leq 10$	3	1,2
$10 < r \leq 20$	4	1,6
$20 < r \leq 40$	5	2,0
$40 < r$	6	2,5

* Values are referred from Table 21 of EN 12449:1999

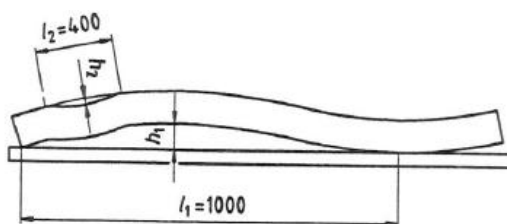


Figure 1 - Measurement of straightness from EN 12449:1999

Dimensions: EN 12449:1999*
Sampling rate

Mass per unit length kg/m	Size of inspection lot for one test sample kg
$\bar{\lambda}_m \leq 0,25$	≤ 500
$0,25 < \bar{\lambda}_m \leq 5$	≤ 1000
$5 < \bar{\lambda}_m$	≤ 2500

* Values are referred from Table 22 of EN 12449:1999